

Low Pass Filter

WGLL-00400

50Ω

DC to 400 MHz

Ver. B

2021.02.23


Maximum Rating

Operating Temperature	-55°C~+100°C
Storage Temperature	-55°C~+100°C
RF Input Power	5W max at 25°C

Pin Connections

RF Input	1
RF Output	3
Ground	2,4


Outline Drawing

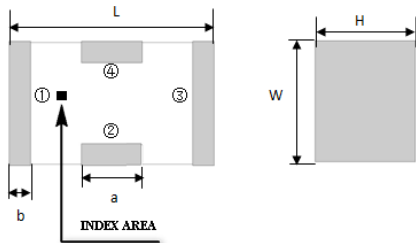

Outline Dimension(mm)

W	L	H
1.6±0.2	3.2±0.2	1.0±0.2
a	b	
0.8±0.1	0.5±0.1	

PCB Land Pattern(mm)

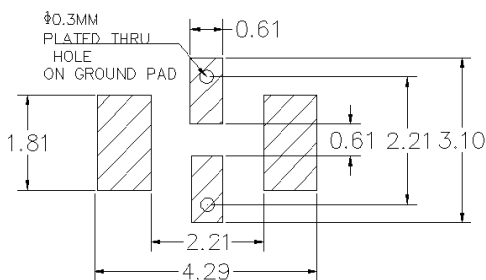

SUGGESTED LAYOUT

TOLERANCE TO BE WITHIN ±0.05mm

Features


- High Performance
- Small Size
- Wide Band
- Ultra Low I.L.
- Temperature Stable
- LTCC Structure

Application

- Harmonic Rejection
- Transmitters/Receivers
- Lab Use



RoHS Compliant

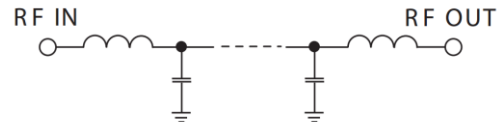

Functional Schematic



Electrical Specifications⁽¹⁾ at 25°C

Parameter		Frequency (MHz)	MIN	Typ.	MAX	Unit
Pass Band	Insertion Loss	DC-400	-	1.0	1.2	dB
	Freq. Cut-off	525	-	3.0	-	dB
	VSWR	DC-400	-	1.2	1.5	:1
Stop Band	Rejection Loss	660	20	30	-	dB
		680-3000	20	30	-	dB
		5500	15	25	-	dB

(1) Test on our Demo Board.

Typical Performance at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	0.08	1.02
100	0.21	1.15
400	0.95	1.3
560	7.9	4.07
680	42.18	24.1
700	44	27.39
1000	41.7	65.54
2000	40.15	74.3
2500	46.1	81.53
3000	54.2	86.56
4000	41.33	78.3
5000	31.3	46.4
5500	23.96	15.33
6000	26.8	47.8
7000	25.37	42.6

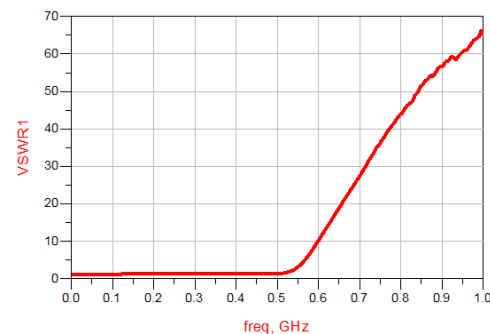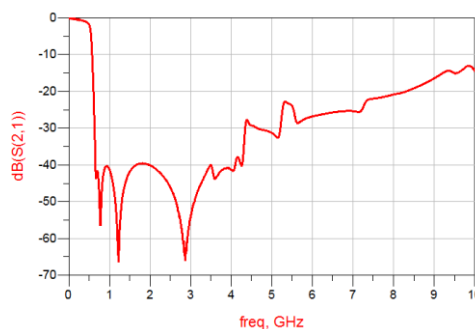

Notes:

- The specifications are tested at 25°C±5°C, relative humidity 55~75%.
- Other quality and characteristic not specify in this datasheet. Please contact us for detail requirements.



Well Genius Technology (Shanghai) LTD.

Room 1001, Block C, Hi-Tech Building, No.900 Yi Shan Rd, Shanghai, P.R.C, 200233

Tel: (021) 6495 8888

Fax: (021) 5423 5889

www.wellgenius.com