
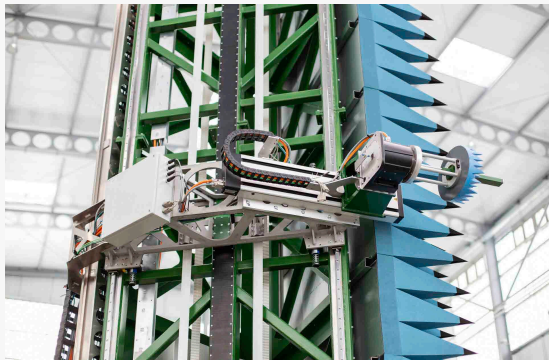


PLANAR NEAR-FIELD SCANNER SYSTEMS

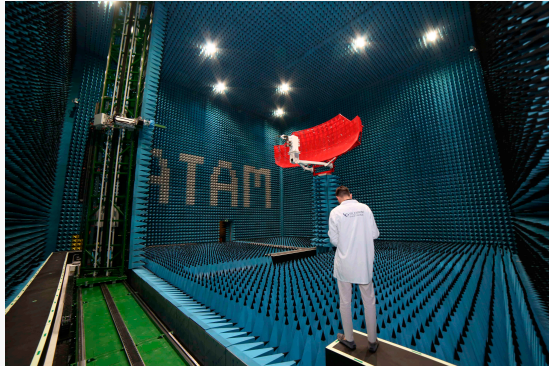

ASYSOL's **Planar Near-Field scanner systems** are the most accurate and fastest and can be configured as a vertical or horizontal scan plane.

All the scanners are manufactured and tested in our advanced production facilities, ensuring that they achieve ultra-high precision and planarity with the aid of the most advanced laser measurement equipment.

A lightweight tower structure with high rigidity travels along a high precision backlash free floor slide; planar Near-Field scanners are available in sizes with a travel range from 0.5m to 60m and utilise distributed driver electronics.

The ASY-RL-20 polarisation positioner sits upon a linear Z-slide, offering compensated planarity for maximum precision. The scanners are fitted with absorber screens which are adaptable to the customers' application and frequency range. Industry standard brushless and linear motors, alongside absolute direct linear encoders, offer backlash and error free precision. Rotary joints, RF connectors and internal RF wiring are included as standard.

Real-time control gives users high speed operating conditions within the shortest possible acquisition time. Ease of user operation is key. Onsite installation is provided with laser alignment and calibration in addition to a test and calibration report, user manuals and documentation.

APPLICATIONS & OPTIONS

- * High gain planar antennas
- * Phased array antennas
- * Satellite antennas
- * Base riser
- * Laser tracking system
- * Dual-polarised probes



WHERE
INNOVATION
IS STANDARD

PRODUCTS OF ASYSOL

Near/Far-Field Ranges · Compact Antenna Test Range · Test Antennas · Motion components · Special Positioning Configuration · Anechoic Chambers · Software

MODEL NO.	ASY-PNF-S	ASY-PNF-M	ASY-PNF-L
Material	aluminium	steel	steel
Motor type	standard	linear	linear
Planarity [mm]	0.07	0.07	0.07 - 0.25
Accuracy X, Y, Z [mm]*	0.1	0.1	0.07 - 0.3
Max X travel range [m]	2.4	5	60
Max Y travel range [m]	2.4	5	15
Max Z travel range [m]	0.3	0.6	1.2
ROLL-positioner	ASY-RL-M2	ASY-RL-M10	ASY-RL-M10
Max velocity [m/s]	0.3	1.2	1.2
Maximum load on probe carriage [kg]	20	60	60

** for higher accuracies consult the factory*

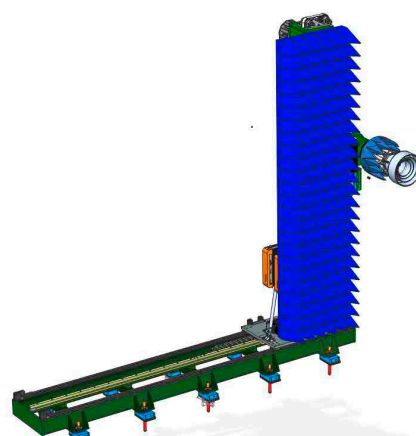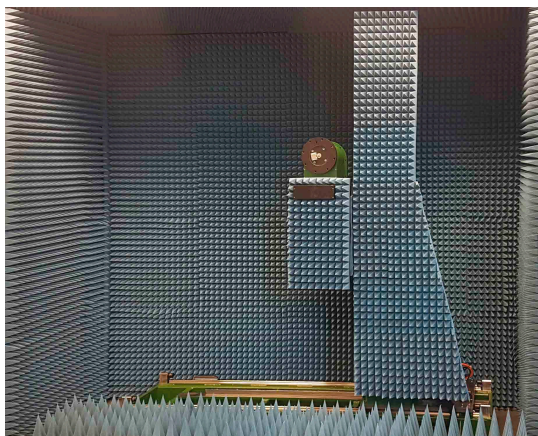

ANTENNA SYSTEMS SOLUTIONS

C/ Isabel Torres 9
39011 Santander
Cantabria · SPAIN

sales@asysol.com
www.asysol.com
+34 942 05 04 85