

# Low Pass Filter

## WGLL-01400

50Ω DC to 1400 MHz

Ver. A  
2022.02.22


### Maximum Rating

Operating Temperature	-55°C~+100°C
Storage Temperature	-55°C~+100°C
RF Input Power	10W max at 25°C

### Pin Connections


RF Input	1
RF Output	3
Ground	2,4

### Outline Drawing

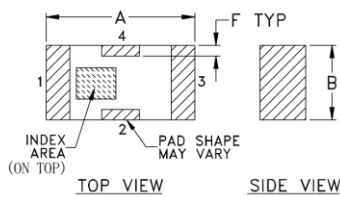


TOP VIEW

SIDE VIEW



FRONT VIEW

### PCB Land Pattern

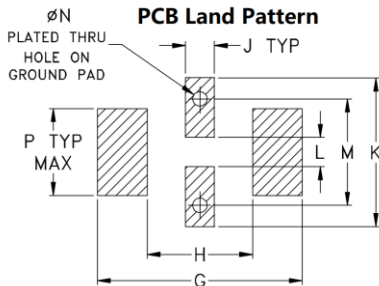


Suggested Layout

Tolerance to be within  $\pm 0.002$

### Outline Dimensions (Tolerance) mm

A	B	C	D	E	F	G	
3.20	1.60	0.95	0.51	0.81	0.23	4.29	
$\pm 0.2$	$\pm 0.2$	$\pm 0.2$	$\pm 0.1$	$\pm 0.1$	$\pm 0.1$		
H	J	K	L	M	N	P	wt
2.21	0.61	3.10	0.61	2.21	0.30	1.8	.020

### Demo Board MCL P/N: T-39 Suggested PCB Layout (PL-137)

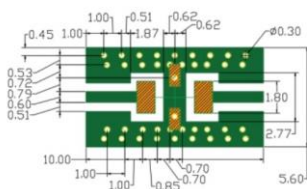

NOTES: 1. COPLANAR WAVEGUIDE PARAMETERS ARE SHOWN FOR ROGERS RO4350 WITH THICKNESS .508"  $\pm$  .0015". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH & GAP MAY NEED TO BE MODIFIED.


2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.  
 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)  
 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- High Performance
- Small Size
- Wide Band
- Ultra Low I.L.
- Temperature Stable
- LTCC Structure



RoHS Compliant

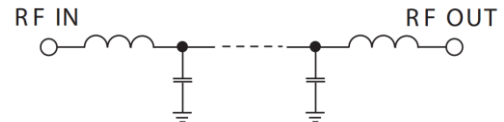

Functional Schematic

### Application

- Harmonic Rejection
- Transmitters/Receivers
- Lab Use



### Electrical Specifications<sup>(1)</sup> at 25°C

Parameter		Frequency (MHz)	MIN	Typ.	MAX	Unit
Pass Band	Insertion Loss	DC-1400	-	0.9	1.0	dB
	Freq. Cut-off	1790	-	3.0	-	dB
	VSWR	DC-1400	-	1.2	1.5	:1
Stop Band	Rejection Loss	2015	20	25	-	dB
		2100-6600	20	30	-	dB
		6800	15	20	-	dB

(1) Tested on Demo Board.

### Typical Performance at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
100	0.10	1.03
500	0.21	1.11
1000	0.41	1.17
1400	0.66	1.06
1700	1.53	1.24
1975	19.32	9.41
2000	23.38	10.38
2050	33.66	12.14
3000	38.96	17.54
4000	30.80	18.16
5000	28.92	26.12
6600	28.54	39.71
6800	25.89	27.65
7000	21.74	23.17

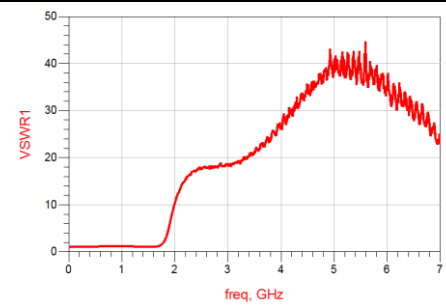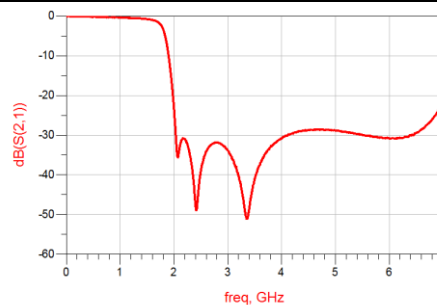

### Notes

- The specifications are tested at 25°C $\pm$ 5°C, relative humidity 55~75%.
- Other quality and characteristic not specify in this datasheet. Please contact us for detail requirements.



Well Genius Technology (Shanghai) LTD.

Room 1001, Block C, Hi-Tech Building, No.900 Yi Shan Rd, Shanghai, P.R.C, 200233

Tel: (021) 6495 8888

Fax: (021) 5423 5889

www.wellgenius.com